
**NAO17X30X13-XL**

Needle roller bearing

Needle roller bearings NAO, without ribs

X-life



Informacje techniczne


**Main Dimensions & Performance Data**

d	17 mm	Bore diameter
D	30 mm	Outside diameter
B	13 mm	Width
C _r	11.800 N	Basic dynamic load rating, radial
C _{0r}	15.900 N	Basic static load rating, radial
C _{ur}	2.600 N	Fatigue load limit, radial
n _G	20.400 1/min	Limiting speed
n _{gr}	11.100 1/min	Reference speed
≈m	42,1 g	Masa

Mounting dimensions

d _a	21,5 mm	Mounting dimension
D _b	22,4 mm	Shoulder diameter axial guidance NK/housing
d _b	25,6 mm	Shoulder diameter axial guidance NK/shaft
D _a	26,3 mm	Shoulder diameter outer ring
r _{a max}	0,3 mm	Maximum recess radius

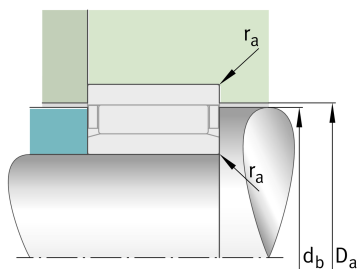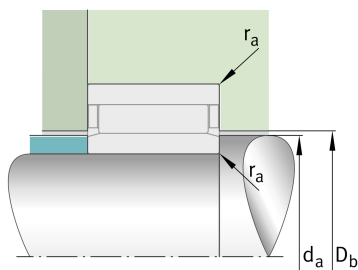



Dimensions

F	22 mm	Raceway diameter inner ring
E	26 mm	Raceway diameter outer ring
r _{min}	0,3 mm	Minimum chamfer dimension
s	0,5 mm	Axial displacement

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Właściwości



Obciążenie promieniowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia



Mała przestrzeń zabudowy