




NSCS-1002

Hydraulic cylinder, 700 bar

BETEX NSCS Compact cylinder, short stroke, single-acting, spring return, 100T class

Informacje techniczne

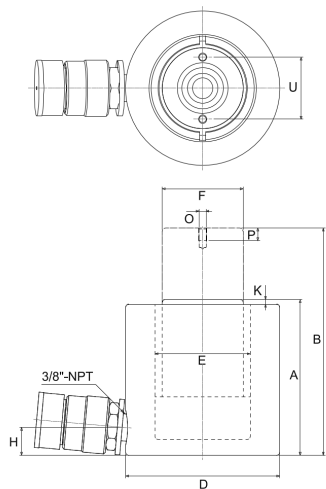

Twoja aktualna wersja produktu

Series	NSCS	Short stroke cylinder
Version	100T	Capacity class 100

Technical data

	100	Capacity class (tons)
s _p	58 mm	Stroke
F _a	1.002 kN	Advance force, max.
P _{max}	700 bar	Operating pressure, max.
V _{oil}	830 cm³	Oil capacity
A	146,5 mm	Height, retracted
B	204,5 mm	Height, extended
D	165 mm	Outer diameter
E	135 mm	Cylinder bore diameter
F	92 mm	Plunger diameter
H	25 mm	Base to advance port
K	1,5 mm	Piston protrusion
O	M8	Plunger female thread
P	10 mm	Plunger thread length
U	55 mm	Piston mounting holes, bolt circle
≈m	22,7 kg	Masa



Additional information

Hard chrome plated and hardened piston, Rolled inside of cylinder, Sandblasted outside with black nitride coating, Coupling with dust cap	Product specifics
---	-------------------