

NUKRE72

Stud type track roller

Stud type track rollers NUKRE..-A, double row cylindrical roller bearings with particularly thick-walled outer ring, full complement cylindrical roller set and with a solid roller stud with fixing thread and a mounting aid, the outer ring is guided axially by the rolling elements, labyrinth seals on both sides,with eccentric collar

Informacje techniczne

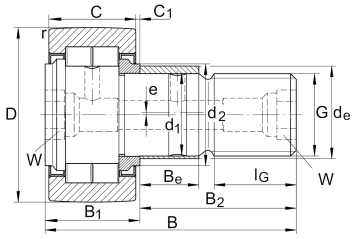

Twoja aktualna wersja produktu

Sealing	2LB	Labyrinth seals on both sides
Outer ring profile	IOP	Optimized INA-profile
Grease nipples	2x	Drive-fit lubrication nipple unmounted 2x
Relubrication feature	KS	Via head and stud
Assembling aid head	I6	Hexagon socket
Assembling aid stud	I6	Hexagon socket

Main Dimensions & Performance Data

D	72 mm	Outside diameter
d_1	24 mm	Fit diameter of roller stud / stud
B	80 mm	Width
C_{rw}	45.500 N	Basic dynamic load rating, radial
C_{0rw}	65.000 N	Basic static load rating, radial
C_{urw}	8.900 N	Fatigue load limit, radial
n_{DG}	2.600 1/min	Speed on permanent grease lubrication
F_{0rper}	62.000 N	Permissible static load, radial
F_{rper}	31.500 N	Permissible dynamic load outer ring, radial
≈m	1,007 kg	Masa

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje

Dimensions

B_1	30,6 mm	Maximum witdh of thrust washer
B_2	49,5 mm	Bolt/stud length effectively
C	28 mm	Width, outer ring
C_1	1,3 mm	Protrusion outer ring to thrust washer
r_{min}	1,1 mm	Minimum chamfer dimension
d_2	44 mm	Stop diameter of thrust washer
G	M24X1,5	Thread
l_G	25 mm	Thread length
W	14 mm	Width of flats
d_e	28 mm	Diameter of eccentric
B_e	22 mm	Width, eccentric
e	1 mm	Eccentricity

Additional information

	NIPA3X9,5	Drive-fit lubrication nipple
M_A	220 Nm	Tightening torque nut

Właściwości

- Obciążenie promieniowe
- Obciążenie osiowe jednokierunkowe
- Obciążenie osiowe dwukierunkowe
- Smarowanie smarem
- Smarowanie olejem
- Bez uszczelnienia

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje