**PASE30-N-FA106**

Plummer block housing unit

Plummer block housing unit PASE...-N-FA106,
RIBB cast iron ASE SAO AK

Informacje techniczne

Twoja aktualna wersja produktu


Material	GG	Grey cast iron
Groove	N	Cast iron housing with undercut slot for end caps
Manufacturing instruction	FA106	Bearing subjected to special noise testing

Main Dimensions & Performance Data

d	30 mm	Bore diameter
L	158 mm	Length total
H ₂	82 mm	Height
C _r	19.500 N	Basic dynamic load rating, radial
C _{0r}	11.300 N	Basic static load rating, radial
≈m	1,04 kg	Masa

Mounting dimensions

J	117,5 mm	Distance fixing bore
N	14 mm	Width (slot)
N ₁	22 mm	Length (slot)

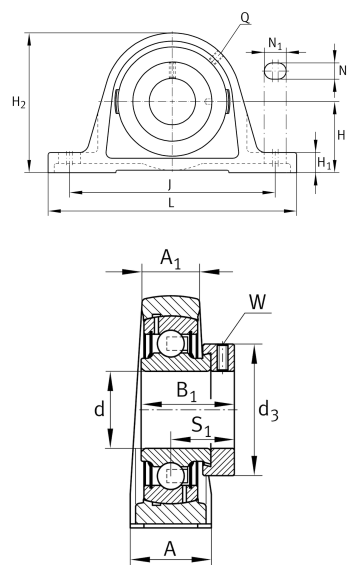



Dimensions

H	42,9 mm	Distance shaft axis
A	40 mm	Width (base)
A ₁	25 mm	Width (head)
H ₁	17 mm	Height (base)
B ₁	35,8 mm	Locking collar total width
S ₁	26,8 mm	Distance of raceway to locking collar
Q	M6	Connection thread for lubrication

Additional information

GEHASE06-GG-N	Housing
GRAE30-NPP-B-FA106	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.