



IMAGE  
COMING SOON



PBY15-XL

Plummer block housing unit

Plummer block housing unit PBY...-XL, RIBB  
sheet metal PB

X-life

Informacje techniczne

Twoja aktualna wersja produktu

Material Steel sheet

Main Dimensions & Performance Data



|                   |          |                                   |
|-------------------|----------|-----------------------------------|
| d                 | 15 mm    | Bore diameter                     |
| L                 | 85,7 mm  | Length total                      |
| H <sub>2</sub>    | 43,2 mm  | Height                            |
| C <sub>0r</sub> G | 1.350 N  | Load carrying capacity (housing)  |
| C <sub>r</sub>    | 10.100 N | Basic dynamic load rating, radial |
| C <sub>0r</sub>   | 4.750 N  | Basic static load rating, radial  |
| ≈m                | 0,15 kg  | Masa                              |

Mounting dimensions

|   |        |                      |
|---|--------|----------------------|
| J | 68 mm  | Distance fixing bore |
| N | 9,5 mm | Fixing bore          |

Dimensions

|                |         |                     |
|----------------|---------|---------------------|
| H              | 22,2 mm | Distance shaft axis |
| A              | 25,4 mm | Width (base)        |
| A <sub>1</sub> | 18,4 mm | Width (head)        |
| H <sub>1</sub> | 2,6 mm  | Height (base)       |

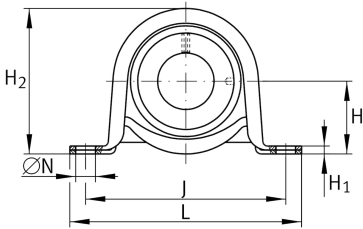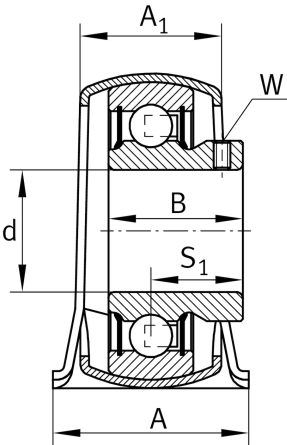



Additional information

|                |               |                     |
|----------------|---------------|---------------------|
| f <sub>0</sub> | 13            | Calculation factor  |
|                | GEH40-BT      | Housing             |
|                | AY15-XL-NPP-B | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |