




PCJT35-TV-FA125.5 [🔗](#)

Flanged housing unit

Flanged housing unit PCJT...-TV

Informacje techniczne

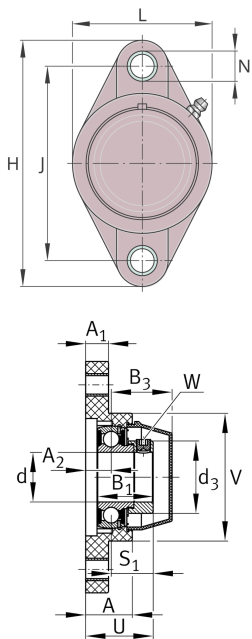

Twoja aktualna wersja produktu

Material	TV	Plastic
Manufacturing instruction	FA125.5	Bearing with Corroprotect coating

Main Dimensions & Performance Data

d	35 mm	Bore diameter
L	90 mm	Flange width
H	163 mm	Height flange
U	47,5 mm	Total height unit
C _r	22.500 N	Basic dynamic load rating, radial
C _{0r}	12.500 N	Basic static load rating, radial
C _{0r G}	14.900 N	Load carrying capacity (housing)
≈m	0,69 kg	Masa

Mounting dimensions

J	130 mm	Distance fixing bore
N	13 mm	Fixing bore
n	2	Number of screwing holes



Dimensions

A	32,8 mm	Height housing
A ₁	16,1 mm	Thickness of flange
A ₂	18 mm	Distance raceway
V	90 mm	Shoulder diameter housing
Q	1/4-28 UNF	Connection thread for lubrication
d ₃	55 mm	Outside diameter locking collar

Additional information

1	Number of housings
CJT07-TV	Housing
GRAE35-NPP-B-FA107/125.5	Bearing designation
KASK07	Protecting cap

Temperature range

T _{min}	-35 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.