




PCJT60-N-FA125.8

Flanged housing unit

Informacje techniczne

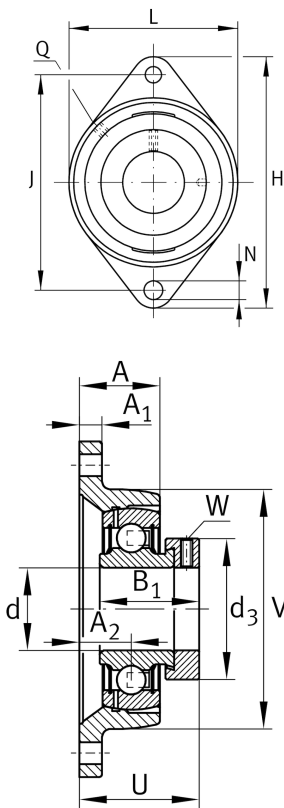

Twoja aktualna wersja produktu

Groove	N	Cast iron housing with undercut slot for end caps
Material	GG	Grey cast iron
Manufacturing instruction	FA125.8	Housing with Corrotext coating

Main Dimensions & Performance Data

d	60 mm	Bore diameter
L	138 mm	Flange width
H	238 mm	Height flange
U	73,6 mm	Total height unit
C _r	52.000 N	Basic dynamic load rating, radial
C _{0r}	36.000 N	Basic static load rating, radial
≈m	3,39 kg	Masa

Mounting dimensions

J	202 mm	Distance fixing bore
N	18 mm	Fixing bore
W	5 mm	Width of flats



Dimensions

A	46 mm	Height housing
A ₁	16 mm	Thickness of flange
A ₂	34 mm	Distance raceway
B ₁	53,1 mm	Locking collar total width
Q	M6	Connection thread for lubrication
d ₃	84 mm	Outside diameter locking collar

Additional information

GEHCJT12-GG-N-FA125.1	Housing
GRAE60-XL-NPP-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.