




PHE50-XL

Take-up housing unit

Take-up housing units PHE, cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

X-life

Informacje techniczne

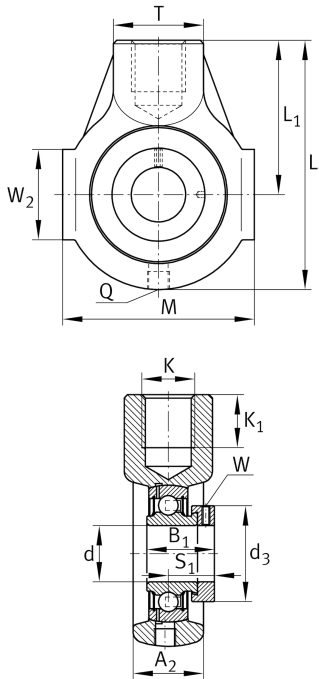

Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

Main Dimensions & Performance Data

|     |         |                     |
|-----|---------|---------------------|
| d   | 50 mm   | Bore diameter       |
| L   | 145 mm  | Length total        |
| M   | 110 mm  | Housing total width |
| A 2 | 40 mm   | Width housing       |
| m   | 1,86 kg | Masa                |

Mounting dimensions

|     |       |                    |
|-----|-------|--------------------|
| K   | M24   | Thread fixing bore |
| K 1 | 24 mm | Thread depth       |

Dimensions

|     |       |                                   |
|-----|-------|-----------------------------------|
| L 1 | 90 mm | Distance shaft axis               |
| T   | 40 mm | Height housing fixing side        |
| W 2 | 46 mm | Length of guidance face           |
| Q   | M6    | Connection thread for lubrication |



Additional information

|                 |                     |
|-----------------|---------------------|
| HE10            | Housing             |
| GRAE50-XL-NPP-B | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |