


PHUSE30-XL

Take-up housing unit

Take-up housing units PHUSE, cast iron and sheet steel housing, radial insert ball bearing with eccentric locking collar, P seals

X-life

Informacje techniczne

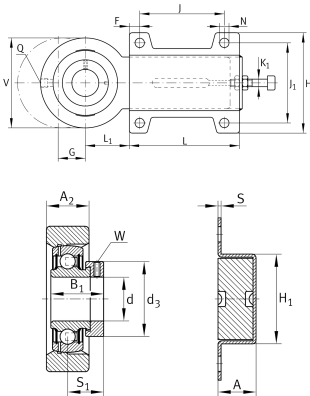

Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

Main Dimensions & Performance Data

|                     |          |                                  |
|---------------------|----------|----------------------------------|
| d                   | 30 mm    | Bore diameter                    |
| H                   | 103 mm   | Height flange                    |
| A                   | 28 mm    | Height housing                   |
| V                   | 88 mm    | Shoulder diameter housing        |
| L                   | 187 mm   | Length total                     |
| C <sub>0</sub> or G | 11.300 N | Load carrying capacity (housing) |
| ≈m                  | 2,8 kg   | Masa                             |

Mounting dimensions

|                |         |                      |
|----------------|---------|----------------------|
| N              | 11,5 mm | Fixing bore          |
| J              | 140 mm  | Distance fixing bore |
| J <sub>1</sub> | 80 mm   | Bore distance width  |



Dimensions

|                |       |                                   |
|----------------|-------|-----------------------------------|
| L <sub>1</sub> | 50 mm | Distance shaft axis               |
| A <sub>2</sub> | 22 mm | Width housing                     |
| H <sub>1</sub> | 52 mm | Height guidance                   |
| K <sub>1</sub> | M12   | Thread adjusting screw            |
| S              | 4 mm  | Thickness of flange               |
| F              | 20 mm | Distance fixing bore outside      |
| G              | 65 mm | Axial displacement                |
| Q              | M6    | Connection thread for lubrication |

Additional information

|                 |                     |
|-----------------|---------------------|
| HUE06           | Housing             |
| HUSE07          | Housing (Part 2)    |
| GRAE30-XL-NPP-B | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |