


PR14044-PP

Linear recirculating roller bearing unit

Linear roller bearings, inch size mounting dimensions, PR..-PP

Informacje techniczne

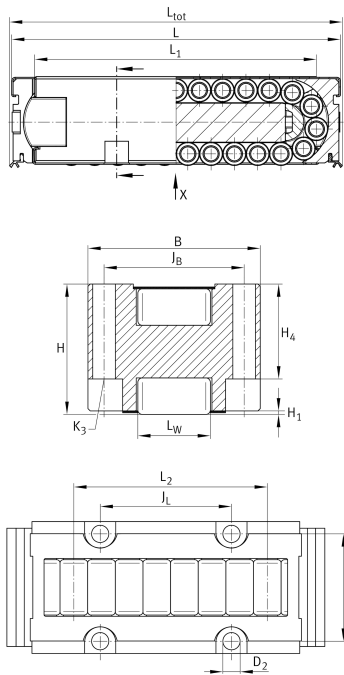

Twoja aktualna wersja produktu

|        |       |                     |
|--------|-------|---------------------|
| Suffix | PP    | With end face wiper |
| Size   | 14044 |                     |

Main Dimensions & Performance Data

|                  |          |                       |
|------------------|----------|-----------------------|
| L <sub>tot</sub> | 78,8 mm  | Length total          |
| B                | 25,4 mm  | Width                 |
| H                | 19,1 mm  | Height                |
| C                | 44.000 N | Load capacity Dynamic |
| C <sub>0</sub>   | 76.000 N | Load capacity static  |
| ≈m               | 0,215 kg | Masa                  |



Mounting dimensions

|         |          |                                 |
|---------|----------|---------------------------------|
| L 1     | 54,6 mm  |                                 |
| J B     | 20,6 mm  | Mounting Dimension              |
| Tol J B | ± 0,1 mm | Tolerance                       |
| J L     | 25,5 mm  | Mounting Dimension              |
| Tol J L | ± 0,1 mm | Tolerance                       |
| H 1     | 0,1 mm   |                                 |
| L 2     | 42 mm    |                                 |
| L W     | 10 mm    |                                 |
| H 4     | 14,8 mm  |                                 |
| K 3     | M3       | Size thread K3                  |
| K3 M A  | 10,8 Nm  | Tightening Torque fixing screws |
| D 2     | 3,65 mm  |                                 |

Related products

|                                                          |                     |
|----------------------------------------------------------|---------------------|
| VUSZ12044-A                                              | Adjustment gib      |
| UG6628, UGN6628,<br>UZ6628, UZN6628,<br>UFK3210, UFB4710 | Suitable Guide Rail |