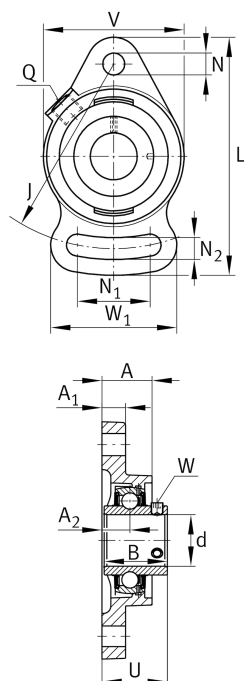


**PSFT35-XL** **Take-up housing unit**

Take-up housing units PSFT, cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

X-life**Informacje techniczne****Twoja aktualna wersja produktu**

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	35 mm	Bore diameter
L	155 mm	Length total
U	44,5 mm	Total height unit
≈m	1,01 kg	Masa

Mounting dimensions

N	14 mm	Fixing bore
N ₁	45 mm	Length (slot)
N ₂	14 mm	Width (slot)
J	128 mm	Distance fixing bore

Dimensions

A ₁	12,5 mm	Thickness of flange
A ₂	15 mm	Distance raceway
A	25 mm	Height housing
V	90 mm	Shoulder diameter housing
W	75 mm	Width housing slot side
Q	M6	Connection thread for lubrication



Additional information

SFT07	Housing
GRAE35-XL-NPP-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.