




PTUE30-XL

Take-up housing unit

Take-up housing units PTUE, cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

X-life

Informacje techniczne

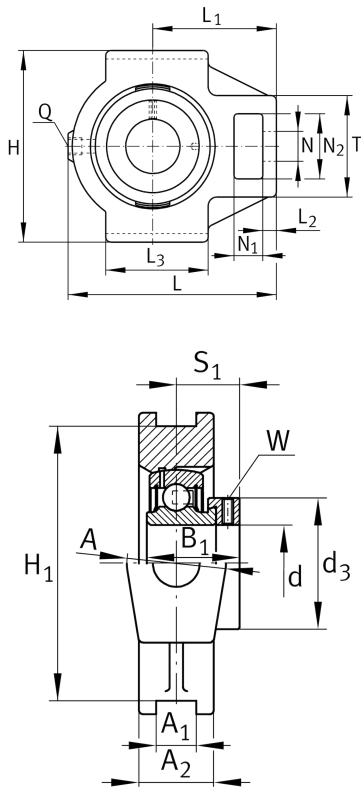

Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

Main Dimensions & Performance Data

|     |          |                            |
|-----|----------|----------------------------|
| d   | 30 mm    | Bore diameter              |
| H   | 102 mm   | Height                     |
| L   | 114,5 mm | Length total               |
| B 1 | 35,8 mm  | Locking collar total width |

≈m 1,19 kg Masa

Mounting dimensions

|     |          |                                          |
|-----|----------|------------------------------------------|
| A 1 | 12 mm    | Width guidance groove                    |
|     | H13      | Width guidance groove clearance          |
| H 1 | 89 mm    | Distance guidance grooves                |
|     | 0,15 mm  | Upper distance guidance groove tolerance |
|     | -0,15 mm | Lower distance guidance groove tolerance |
| N   | 22 mm    | Fixing bore                              |



Dimensions

|                |         |                                       |
|----------------|---------|---------------------------------------|
| L <sub>1</sub> | 70 mm   | Distance shaft axis                   |
| L <sub>2</sub> | 10 mm   | Length fixed link                     |
| L <sub>3</sub> | 57 mm   | Length guidance groove                |
| A              | 37 mm   | Width housing fixing side             |
| N <sub>1</sub> | 18 mm   | Width recess                          |
| N <sub>2</sub> | 36,5 mm | Height recess                         |
| S <sub>1</sub> | 26,8 mm | Distance of raceway to locking collar |
| T              | 56 mm   | Height housing fixing side            |
| Q              | M6      | Connection thread for lubrication     |
| A <sub>2</sub> | 25 mm   | Width housing                         |

Additional information

|                 |                     |
|-----------------|---------------------|
| TUE06           | Housing             |
| GRAE30-XL-NPP-B | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |