

**RALT20-XL-FA125.8**

Flanged housing unit

Flanged housing unit RALT...-XL

**X-life**

## Informacje techniczne

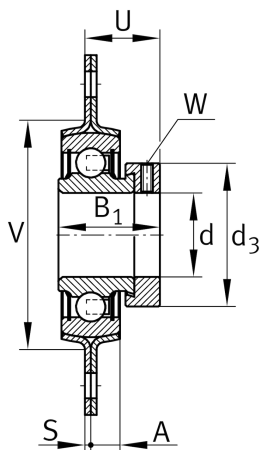

## Twoja aktualna wersja produktu

|                           |             |                                |
|---------------------------|-------------|--------------------------------|
| Material                  | Steel sheet |                                |
| Manufacturing instruction | FA125.8     | Housing with Corrotect coating |

## Main Dimensions &amp; Performance Data

|                   |          |                                  |
|-------------------|----------|----------------------------------|
| L                 | 58,7 mm  | Flange width                     |
| H                 | 81 mm    | Height flange                    |
| U                 | 20,46 mm | Total height unit                |
| C <sub>0r G</sub> | 2.700 N  | Load carrying capacity (housing) |
| C <sub>g</sub>    | 2.700 N  | Load carrying capacity (housing) |
| ≈m                | 0,17 kg  | Masa                             |

## Mounting dimensions

|   |         |                      |
|---|---------|----------------------|
| J | 63,5 mm | Distance fixing bore |
|---|---------|----------------------|

## Dimensions

|                |       |                           |
|----------------|-------|---------------------------|
| A              | 7 mm  | Height housing            |
| S <sub>1</sub> | 2 mm  | Thickness of flange       |
| S              | 2 mm  | Thickness of flange       |
| V              | 48 mm | Shoulder diameter housing |



### Additional information

|                 |                     |
|-----------------|---------------------|
| 2               | Number of housings  |
| FLAN42-LST      | Housing             |
| RALE20-XL-NPP-B | Bearing designation |

### Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |