

## RASE30-TV-VA-FD

Plummer block housing unit

Plummer block housing units, FD design

### Informacje techniczne

#### Twoja aktualna wersja produktu


|                             |       |                               |
|-----------------------------|-------|-------------------------------|
| Special material            | TV    | Plastic housing               |
| Corrosion resistant bearing | VA    | Corrosion-resistant VA design |
| Material                    | TV-FD | Plastic for food industry     |

#### Main Dimensions & Performance Data

|     |         |               |
|-----|---------|---------------|
| d   | 30 mm   | Bore diameter |
| L   | 162 mm  | Length        |
| H 2 | 83 mm   | Height        |
| ≈m  | 0,55 kg | Masa          |

#### Mounting dimensions

|     |        |                      |
|-----|--------|----------------------|
| J   | 119 mm | Distance fixing bore |
| N   | 14 mm  | Width (slot)         |
| N 1 | 18 mm  | Length (slot)        |
| W   | 3 mm   | Width of flats       |

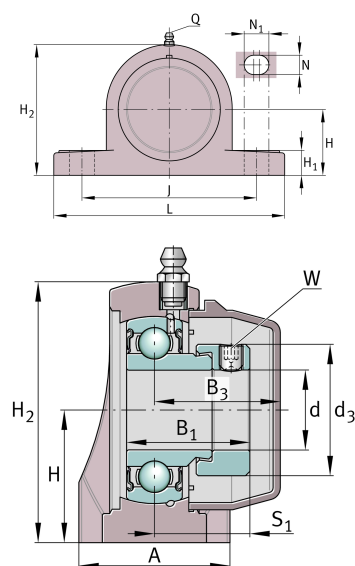



Dimensions

|                |             |                                           |
|----------------|-------------|-------------------------------------------|
| H              | 42,9 mm     | Distance shaft axis                       |
| A              | 46 mm       | Width (base)                              |
| H <sub>1</sub> | 17,8 mm     | Height (base)                             |
| B <sub>1</sub> | 35,7 mm     | Locking collar total width                |
| B <sub>3</sub> | 39,95 mm    | Distance housing centre to cap end        |
| S <sub>1</sub> | 27,7 mm     | Distance raceway to locking collar        |
| Q              | 1/4"-28 UNF | Connection thread for lubrication         |
| d <sub>3</sub> | 44,5 mm     | Outside diameter eccentric locking collar |

Additional information

|                        |                     |
|------------------------|---------------------|
| GEH.ASE06-TV-WHT       | Housing             |
| GE30-KRR-B-FA107-VA-FD | Bearing designation |
| KASK06-S-G-WHT         | End cap             |
| KASK06-S-R-NBR-WHT     | Open protecting cap |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -30 °C | Operating temperature min. |
| T <sub>max</sub> | 100 °C | Operating temperature max. |