




RASE90-XL-FA164

Plummer block housing unit

Plummer block housing unit RASE...-XL-FA164, RIBB cast iron ASE SAO AK

X-life

Informacje techniczne

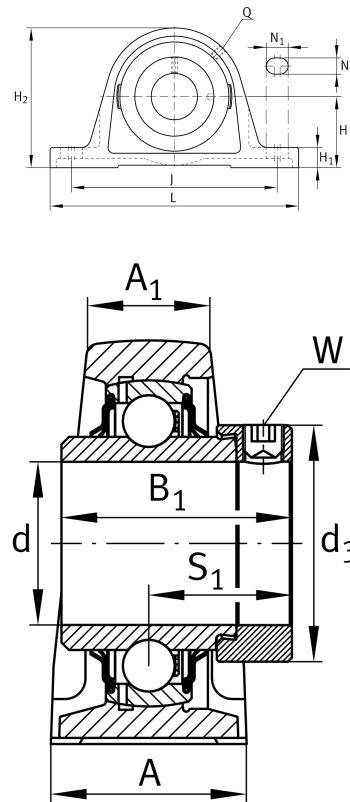

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
Manufacturing instruction	FA164	High temperature design up to +250°C

Main Dimensions & Performance Data

d	90 mm	Bore diameter
L	330 mm	Length total
H 2	200 mm	Height
≈m	12,12 kg	Masa

Mounting dimensions

J	268 mm	Distance fixing bore
N	27 mm	Width (slot)
N 1	35 mm	Length (slot)



Dimensions

H	101,6 mm	Distance shaft axis
A	85 mm	Width (base)
A ₁	55 mm	Width (head)
H ₁	35 mm	Height (base)
B ₁	69,6 mm	Locking collar total width
S ₁	46,6 mm	Distance of raceway to locking collar
Q	M6	Connection thread for lubrication

Additional information

GEHASE18-GG	Housing
GE90-XL-KRR-B-FA164	Bearing designation

Temperature range

T _{min}	150 °C	Operating temperature min.
T _{max}	250 °C	Operating temperature max.