
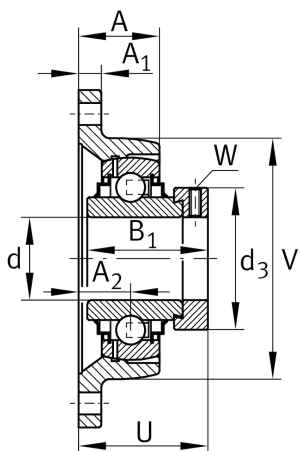


**RCJT60-FA164**

Flanged housing unit

Flanged housing unit RCJT...-FA164

Informacje techniczne



Twoja aktualna wersja produktu

Material	GG	Grey cast iron
Manufacturing instruction	FA164	High temperature design up to +250°C

Main Dimensions & Performance Data

d	60 mm	Bore diameter
L	138 mm	Flange width
H	238 mm	Height flange
U	80,8 mm	Total height unit
C _r	52.000 N	Basic dynamic load rating, radial
C _{0r}	36.000 N	Basic static load rating, radial
≈m	3,43 kg	Masa

Mounting dimensions

J	202 mm	Distance fixing bore
N	18 mm	Fixing bore
n	2	Number of screwing holes
W	5 mm	Width of flats



Dimensions

A	46 mm	Height housing
A ₁	16 mm	Thickness of flange
A ₂	34 mm	Distance raceway
B ₁	77,9 mm	Locking collar total width
V	138 mm	Shoulder diameter housing
Q	M6	Connection thread for lubrication
d ₃	84 mm	Outside diameter locking collar

Additional information

1	Number of housings
GEHCJT12-GG-N-FA125.1	Housing
GE60-XL-KRR-B-FA164	Bearing designation
KASK12	Protecting cap

Temperature range

T _{min}	150 °C	Operating temperature min.
T _{max}	250 °C	Operating temperature max.