




RTUE100-XL

Take-up housing unit

Take-up housing units RTUE, cast iron housing, radial insert ball bearing with eccentric locking collar, R seals

X-life

Informacje techniczne

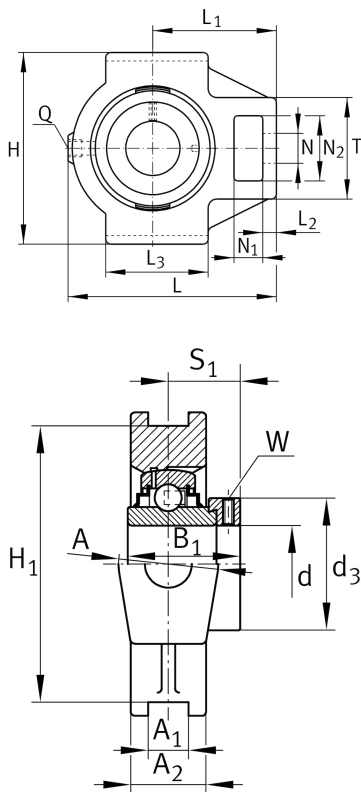

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	100 mm	Bore diameter
H	240 mm	Height
L	295 mm	Length total
B 1	75 mm	Locking collar total width

≈m 15,51 kg Masa

Mounting dimensions

A 1	28 mm	Width guidance groove
	H13	Width guidance groove clearance
H 1	215 mm	Distance guidance grooves
	0,25 mm	Upper distance guidance groove tolerance
	-0,25 mm	Lower distance guidance groove tolerance
N	47 mm	Fixing bore



Dimensions

L 1	180 mm	Distance shaft axis
L 2	30 mm	Length fixed link
L 3	160 mm	Length guidance groove
A	90 mm	Width housing fixing side
N 1	40 mm	Width recess
N 2	80 mm	Height recess
S 1	49,5 mm	Distance of raceway to locking collar
T	130 mm	Height housing fixing side
Q	M6	Connection thread for lubrication
A 2	60 mm	Width housing

Additional information

TUE20	Housing
GE100-XL-KRR-B	Bearing designation

Temperature range

T min	-20 °C	Operating temperature min.
T max	120 °C	Operating temperature max.