


RUDS55X300-D-H

Damping carriage, recirculating roller bearing unit

Damping carriage, recirculating roller bearing unit

Informacje techniczne

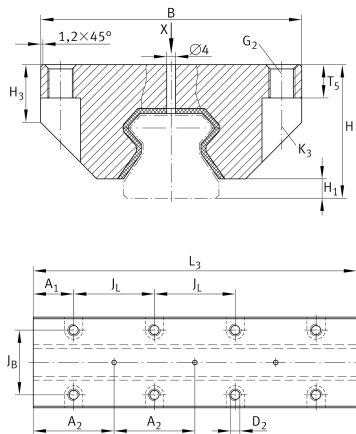

Twoja aktualna wersja produktu

|         |     |                  |
|---------|-----|------------------|
| Size    | 55  |                  |
| Length  | 300 | Standardlength 3 |
| Suffix  | D   |                  |
| Version | H   | High version     |

Main Dimensions & Performance Data

|     |         |                   |
|-----|---------|-------------------|
| H   | 80 mm   | Height            |
| B   | 98 mm   | Width             |
| L 3 | 300     | Standard length 3 |
| ≈m  | 11,6 kg | Masa              |

Mounting dimensions

|        |         |                          |
|--------|---------|--------------------------|
| H 1    | 13 mm   |                          |
| T 5    | 18 mm   |                          |
| H 3    | 61 mm   |                          |
| J B    | 75 mm   |                          |
| A 1    | 37,5 mm |                          |
| A 2    | 75 mm   |                          |
| J L    | 75 mm   |                          |
| G 2    | M12     | Fixing screws            |
| G2 M A | 144 Nm  | Tightening torque        |
| n      | 8       | Number of fixing threads |



### Related products

---

RUE55-E-H, RUE55-  
E-HL, RUE55-F-H,  
RUE55-F-HL

Suitable linear guidances