


IMAGE
COMING SOON**RUKS35-D-A-SO**

Braking/clamping element

Clamping element RUKS...-D-A-SO, for linear
recirculating roller bearing and guideway
assembly, oil connector on top

Informacje techniczne

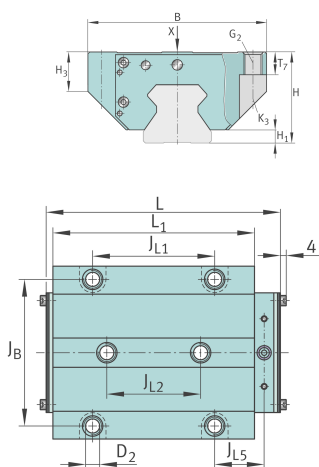


Twoja aktualna wersja produktu

Size	35	
Version	D	
Internal design	A	
Oil feed	SO	Oil feed from above

Main Dimensions & Performance Data

H	48 mm	Height sytem
B	98 mm	Width clamping element
L	134,3 mm	Length of clamping element
≈m	2,41 kg	Masa



Mounting dimensions

J _B	82 mm	Hole pattern width
L ₁	113 mm	Length saddle plate
J _{L1}	62 mm	Hole pattern lengthwise
J _{L2}	52 mm	Hole pattern centre
J _{L5}	32 mm	Distance
N _{2 max}	6 mm	Max diameter lubrication hole adjacent constr
H ₁	6,8 mm	Space (system)
H ₃	21 mm	
T ₇	12 mm	Depth thread
G ₂	M10	Size thread above for DIN ISO 4762-12.9
M _{G 2}	41 Nm	Tightening torque above
K ₃	M8	Size thread below for DIN ISO 4762-12.9
M _{K 3}	41 Nm	Tightening torque below
D ₂	8,6 mm	Through-bore

Related products

TSX35-E; TSX35-F	Suitable guideway
RUE35-E; RUE35-F	Suitable system