




RUKS45-D-A-H-SO

Braking/clamping element

Clamping element RUKS...-D-A-H-SO, for linear recirculating roller bearing and guideway assembly, oil connector on top

Informacje techniczne

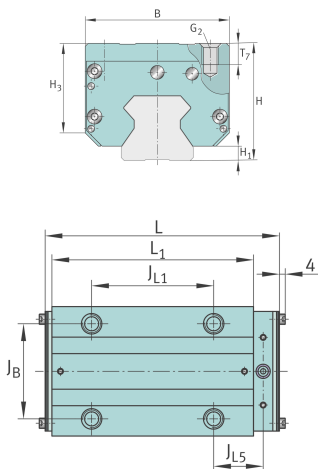


Twoja aktualna wersja produktu

Size	45	
Version	D	
Internal design	A	
Carriage design	H	High carriage
Oil feed	SO	Oil feed from above

Main Dimensions & Performance Data

H	70 mm	Height sytem
B	84 mm	Width clamping element
L	156,6 mm	Length of clamping element
≈m	4,25 kg	Masa



Mounting dimensions

J B	60 mm	Hole pattern width
L 1	134 mm	Length saddle plate
J L1	60 mm	Hole pattern lengthwise
J L5	43,5 mm	Distance
N 2 max	6 mm	Max diameter lubrication hole adjacent constr
H 1	8,7 mm	Space (system)
H 3	58,3 mm	
T 7	12,5 mm	Depth thread
G 2	M10	Size thread above for DIN ISO 4762-12.9
M G 2	83 Nm	Tightening torque above

Related products

TSX45-E; TSX45-F	Suitable guideway
RUE45-E; RUE45-F	Suitable system