


IMAGE
COMING SOON**RUKS45-D-A-SO**

Braking/clamping element

Clamping element RUKS...-D-A-SO, for linear
recirculating roller bearing and guideway
assembly, oil connector on top

Informacje techniczne

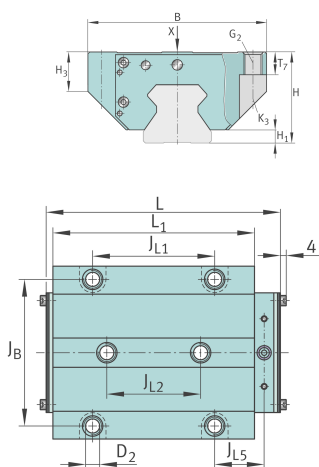


Twoja aktualna wersja produktu

Size	45	
Version	D	
Internal design	A	
Oil feed	SO	Oil feed from above

Main Dimensions & Performance Data

H	60 mm	Height sytem
B	118 mm	Width clamping element
L	156,6 mm	Length of clamping element
≈m	4,34 kg	Masa



Mounting dimensions

J _B	100 mm	Hole pattern width
L ₁	134 mm	Length saddle plate
J _{L1}	80 mm	Hole pattern lengthwise
J _{L2}	60 mm	Hole pattern centre
J _{L5}	33,5 mm	Distance
N _{2 max}	6 mm	Max diameter lubrication hole adjacent constr
H ₁	8,7 mm	Space (system)
H ₃	27 mm	
T ₇	15 mm	Depth thread
G ₂	M12	Size thread above for DIN ISO 4762-12.9
M _{G 2}	83 Nm	Tightening torque above
K ₃	M10	Size thread below for DIN ISO 4762-12.9
M _{K 3}	83 Nm	Tightening torque below
D ₂	10,6 mm	Through-bore

Related products

TSX45-E; TSX45-F	Suitable guideway
RUE45-E; RUE45-F	Suitable system