



IMAGE
COMING SOON




RUKS55-D-A-H-SR

Braking/clamping element

Clamping element RUKS...-D-A-H-SR, for linear recirculating roller bearing and guideway assembly, oil connector on side

Informacje techniczne

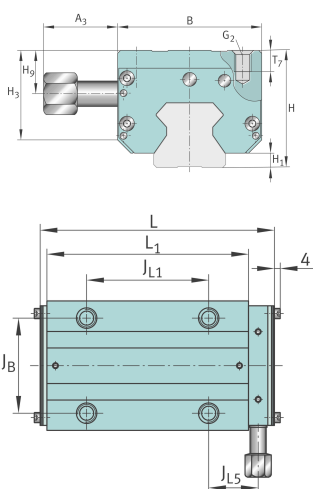

Twoja aktualna wersja produktu

Size	55	
Version	D	
Internal design	A	
Carriage design	H	High carriage
Oil feed	SR	Oil connector on side

Main Dimensions & Performance Data

H	80 mm	Height sytem
B	98 mm	Width clamping element
L	186,3 mm	Length of clamping element
≈m	6,51 kg	Masa



Mounting dimensions

J _B	75 mm	Hole pattern width
A ₃	38,5 mm	Mounting dimension oil connector
L ₁	163 mm	Length saddle plate
J _{L1}	75 mm	Hole pattern lengthwise
J _{L5}	50,5 mm	Distance
N _{2 max}	6 mm	Max diameter lubrication hole adjacent constr
H ₁	11 mm	Space (system)
H ₃	62 mm	
T ₇	15 mm	Depth thread
H ₉	29 mm	
G ₂	M12	Size thread above for DIN ISO 4762-12.9
M G ₂	140 Nm	Tightening torque above

Related products

TSX55-E; TSX55-F	Suitable guideway
RUE55-E; RUE55-F	Suitable system

