



RUS26126-KS

Linear recirculating roller bearing unit

Linear roller bearings with spacer elements,
with end face lubrication connectors RUS..

Informacje techniczne




Twoja aktualna wersja produktu

Suffix	KS	With end face lubrication connectors
Size	26126	

Main Dimensions & Performance Data

L _{tot}	138,1 mm	Total length
B	40 mm	Width
H	26 mm	Height
C	122.000 N	Basic dynamic load rating
C ₀	209.000 N	Basic static load rating
≈m	0,81 kg	Masa

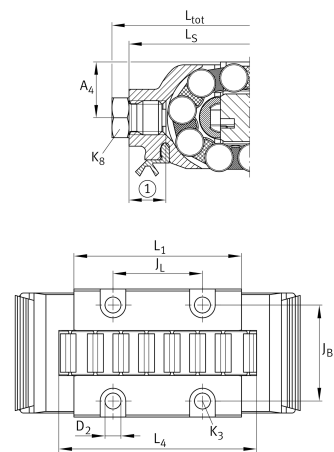

Mounting dimensions

L 1	93 mm	Mounting dimension
J B	30 mm	Mounting dimension
Tol J B	± 0,1 mm	Tolerance
J L	68 mm	
Tol J L	± 0,1 mm	Tolerance
H 1	0,2 mm	
L 4	103 mm	Minimum support length
L W	14 mm	
H 4	21 mm	
T 5	10,2 mm	
G 1	M6	Fixing screws top (DIN ISO 4762-12.9)
G1 M A	17 Nm	Tightening torque fixing screws
K 3	M4	Fixing screws below (DIN ISO 4762-12.9)
K3 M A max	5 Nm	Tightening torque fixing screws
D 2	4,9 mm	
L S	132,1 mm	
A 4	13,2 mm	
	M6	Lubrication connection DIN3405-A
	6 mm	

Related products

VUS26126-A	Adjustment gib
UG9741, UGN9741-A, UZ9741, UZN9741-A, UFK4710, UFB6412	Suitable Guide rail