



**SL1818/800-E-TB-C3**

Cylindrical roller bearing

Cylindrical roller bearing, SL1818..-E-TB  
full complement roller set, single row, semi-  
locating bearing, 1 rib on outer ring, 2 ribs on  
inner ring, type SL18

Informacje techniczne




Twoja aktualna wersja produktu

|                           |              |                                             |
|---------------------------|--------------|---------------------------------------------|
| Design                    | TB           | Bearings with increased axial load capacity |
| Radial internal clearance | C3 (Group 3) | Internal clearance larger than CN           |
| Tolerance class           | PN           | Normal (ISO 492:2023)                       |
| Number of rows            | 1            | Single-row design                           |

Main Dimensions & Performance Data

|                 |             |                                   |
|-----------------|-------------|-----------------------------------|
| d               | 800 mm      | Bore diameter                     |
| D               | 980 mm      | Outside diameter                  |
| B               | 82 mm       | Width                             |
| C <sub>r</sub>  | 2.000.000 N | Basic dynamic load rating, radial |
| C <sub>0r</sub> | 4.700.000 N | Basic static load rating, radial  |
| C <sub>ur</sub> | 400.000 N   | Fatigue load limit, radial        |
| n <sub>G</sub>  | 335 1/min   | Limiting speed                    |
| n <sub>gr</sub> | 188 1/min   | Reference speed                   |
| m               | 126,5 kg    | Masa                              |

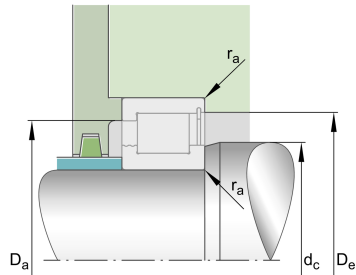



### Mounting dimensions

|              |          |                                      |
|--------------|----------|--------------------------------------|
| $d_{a \min}$ | 862,5 mm | Minimum diameter shaft shoulder      |
| $d_{c \min}$ | 862,5 mm | Minimum shaft shoulder               |
| $D_{a \max}$ | 916,5 mm | Maximum diameter of housing shoulder |
| $D_{e \min}$ | 937,5 mm | Minimum diameter of housing shoulder |
| $r_{a \max}$ | 5 mm     | Maximum recess radius                |
| E            | 937,5 mm | Raceway diameter outer ring          |

### Dimensions

|            |          |                                 |
|------------|----------|---------------------------------|
| $r_{\min}$ | 5 mm     | Minimum chamfer dimension       |
| s          | 10 mm    | Axial displacement              |
| $d_1$      | 862,5 mm | Maximum rib diameter inner ring |
| $D_1 \min$ | 916,6 mm | Minimum rib diameter outer ring |

### Temperature range

|            |        |                            |
|------------|--------|----------------------------|
| $T_{\min}$ | -30 °C | Operating temperature min. |
| $T_{\max}$ | 120 °C | Operating temperature max. |

### Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Łożysko gabarytowe