


TASE25-XL-N

Plummer block housing unit

Plummer block housing units TASE, cast iron housing, radial insert ball bearing with eccentric locking collar, T seals

X-life

Informacje techniczne

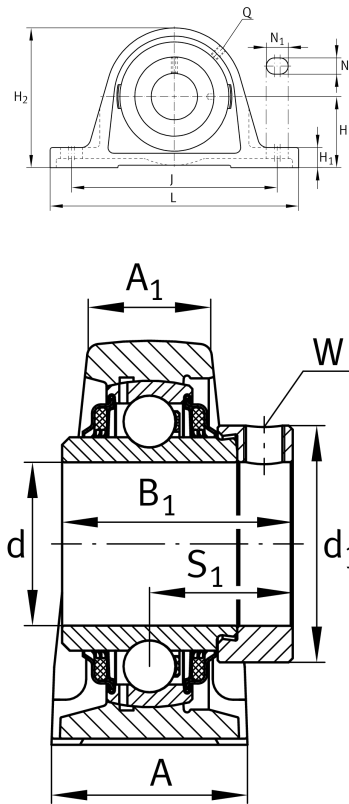

Twoja aktualna wersja produktu

|          |    |                                                   |
|----------|----|---------------------------------------------------|
| Material | GG | Grey cast iron                                    |
| Groove   | N  | Cast iron housing with undercut slot for end caps |
| Material | GG | Cast iron                                         |

Main Dimensions & Performance Data

|                |         |               |
|----------------|---------|---------------|
| d              | 25 mm   | Bore diameter |
| L              | 130 mm  | Length total  |
| H <sub>2</sub> | 70 mm   | Height        |
| ≈m             | 0,75 kg | Masa          |

Mounting dimensions

|                |          |                      |
|----------------|----------|----------------------|
| J              | 102,5 mm | Distance fixing bore |
| N              | 11 mm    | Width (slot)         |
| N <sub>1</sub> | 19 mm    | Length (slot)        |



Dimensions

|                |         |                                       |
|----------------|---------|---------------------------------------|
| H              | 36,5 mm | Distance shaft axis                   |
| A              | 36 mm   | Width (base)                          |
| A <sub>1</sub> | 21 mm   | Width (head)                          |
| H <sub>1</sub> | 14,5 mm | Height (base)                         |
| B <sub>1</sub> | 44,5 mm | Locking collar total width            |
| S <sub>1</sub> | 27 mm   | Distance of raceway to locking collar |
| Q              | M6      | Connection thread for lubrication     |

Additional information

|               |                     |
|---------------|---------------------|
| ASE05         | Housing             |
| GE25-XL-KTT-B | Bearing designation |
| KASK05        | Protecting cap      |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |