




TKDM09X2000-E-W-EWL-G2

Miniature Guideway for Miniature-Carriage, Standard design

Miniature Guideway, Wide design; for Miniature- Carriage, Wide and Wide-Long design

Informacje techniczne

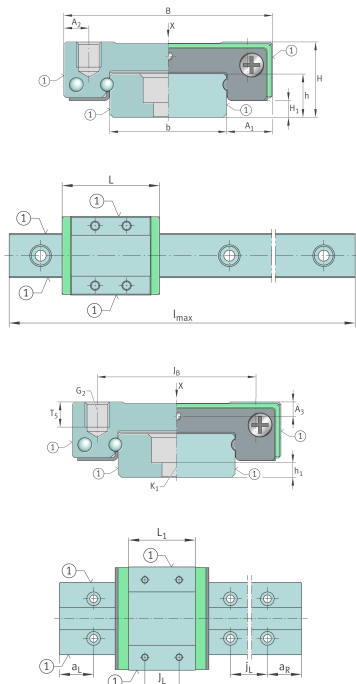

Twoja aktualna wersja produktu

|                 |                                                                                                   |
|-----------------|---------------------------------------------------------------------------------------------------|
| Size            | 09                                                                                                |
| Length          | ~2000                                                                                             |
| Version         | E                                                                                                 |
| Guideway design | przypadku<br>jakichkolwiek<br>pytań prosimy<br>o bezpośredni<br>kontakt z partnerem<br>handlowym. |
| Accuracy class  | G2                                                                                                |

Main Dimensions & Performance Data

|       |          |                                  |
|-------|----------|----------------------------------|
| h     | 7 mm     | Height                           |
| b     | 18 mm    | Width rail                       |
| l max | 2.000 mm | Max length single piece guideway |
| ≈m    | 1,86 kg  | Masa                             |



Mounting dimensions

|                    |        |                                                     |
|--------------------|--------|-----------------------------------------------------|
| h <sub>1</sub>     | 2,5 mm | Length                                              |
| j <sub>L</sub>     | 30 mm  | Increment                                           |
| a <sub>L min</sub> | 5 mm   | Distance between start of guideway and nearest hole |
| a <sub>L max</sub> | 25 mm  | Distance between start of guideway and nearest hole |
| a <sub>R min</sub> | 5 mm   | Distance between end of guideway and nearest hole   |
| a <sub>R max</sub> | 25 mm  | Distance between end of guideway and nearest hole   |
| K <sub>1</sub>     | M3     | Thread                                              |
| K1 M <sub>A</sub>  | 1,1 Nm | Tightening torque                                   |