




TKVD15X4000-B-U-0001-EWL-G1 [🔗](#)

Profile rail

Guideways for linear ball bearing unit and four-row linear recirculating ball guidance system, for screw mounting from below

Informacje techniczne

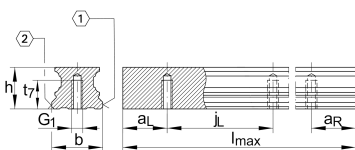

Twoja aktualna wersja produktu

Size code	15
Length	~4000
Version	B
Accuracy class	G1

Main Dimensions & Performance Data

l	4.000 mm	~guideway length
h	15 mm	Height
b	15 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	5,925 kg	Masa

Mounting dimensions

G 1	M5	Thread
G1 M _A	10 Nm	Tightening torque



Dimensions

l_{max}	4.000 mm	Max length single piece guideway
$a_{L\ max}$	53 mm	Distance
$a_{L\ min}$	20 mm	Distance
$a_{R\ max}$	53 mm	Distance
$a_{R\ min}$	20 mm	Distance
j_L	60 mm	Increment
t_7	8 mm	Thread length

Additional information

KWVE15-B...	Usable carriage(s)
KUVE15-B...	Usable linear systems