




TKVD20X4000-U-0001-EWL-G4 [↗](#)

Profile rail

Guideways for linear ball bearing unit and four-row linear recirculating ball guidance system, for screw mounting from below

Informacje techniczne

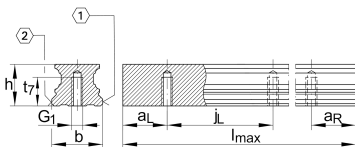

Twoja aktualna wersja produktu

Size code	20
Length	~4000
Accuracy class	G4

Main Dimensions & Performance Data

l	4.000 mm	~guideway length
h	17 mm	Height
b	20 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	8,64 kg	Masa

Mounting dimensions

G 1	M6	Thread
G1 M A	17 Nm	Tightening torque



Dimensions

l_{max}	6.000 mm	Max length single piece guideway
$a_{L\ max}$	53 mm	Distance
$a_{L\ min}$	20 mm	Distance
$a_{R\ max}$	53 mm	Distance
$a_{R\ min}$	20 mm	Distance
j_L	60 mm	Increment
t_7	10 mm	Thread length

Additional information

KWVE20-B	Usable carriage(s)
KUVE20-B	Usable linear systems