


TKVD25X4000-0001-EWL-G2 [🔗](#)

Profile rail

Guideways for linear recirculating ball bearing unit and four-row linear recirculating ball guidance system

Informacje techniczne

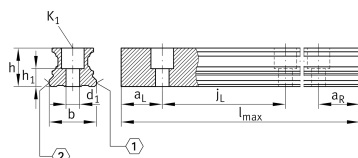

Twoja aktualna wersja produktu

Size code	25
Length	~4000
Accuracy class	G2

Main Dimensions & Performance Data

I	4,000 mm	~guideway length
h	18,7 mm	Height
b	23 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	10,08 kg	Masa

Mounting dimensions

K 1	M6	Thread
K1 M A	17 Nm	Tightening torque
d 1	6,8 mm	Bore diameter



Dimensions

l_{max}	6.000 mm	Max length single piece guideway
$a_{L\ max}$	53 mm	Distance
$a_{L\ min}$	20 mm	Distance
$a_{R\ max}$	53 mm	Distance
$a_{R\ min}$	20 mm	Distance
j_L	60 mm	Increment
h_1	8,2 mm	Length
Tol h_1	0,5 mm	Upper tolerance
Tol h_1	-0,5 mm	Distance Distance