




TKVD30X6000-U-0001-EWL-G4 [🔗](#)

Profile rail

Guideways for linear ball bearing unit and four-row linear recirculating ball guidance system, for screw mounting from below

Informacje techniczne

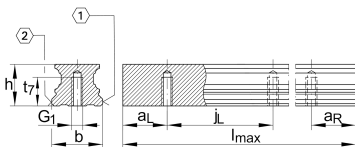

Twoja aktualna wersja produktu

Größenkennziffer	30
Length	~6000
Accuracy class	G4

Main Dimensions & Performance Data

l	6.000 mm	~guideway length
h	23,5 mm	Height
b	28 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	25,32 kg	Masa

Mounting dimensions

G 1	M8	Thread
G1 M A	41 Nm	Tightening torque



Dimensions

l_{max}	6.000 mm	Max length single piece guideway
$a_{L\ max}$	71 mm	Distance
$a_{L\ min}$	20 mm	Distance
$a_{R\ max}$	71 mm	Distance
$a_{R\ min}$	20 mm	Distance
j_L	80 mm	Increment
t_7	15 mm	Thread length

Additional information

KWVE30-B...	Usable carriage(s)
KUVE30-B...	Usable linear systems