


TKVD32X2000-0001-EWL-G3

Guideways for linear recirculating ball bearing unit

full guideway for linear recirculating ball bearing units

Informacje techniczne

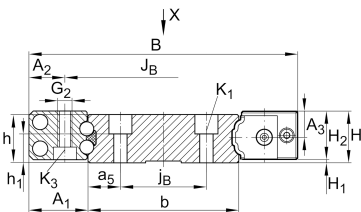

Twoja aktualna wersja produktu



Größenkennziffer 32

Main Dimensions & Performance Data

h	10 mm	Height
b	31,8 mm	Width
≈m	4,3 kg	Masa

Mounting dimensions

K 1	M3	Thread
K1 M A	2,5 Nm	Tightening torque
d 1	3,8 mm	Bore diameter

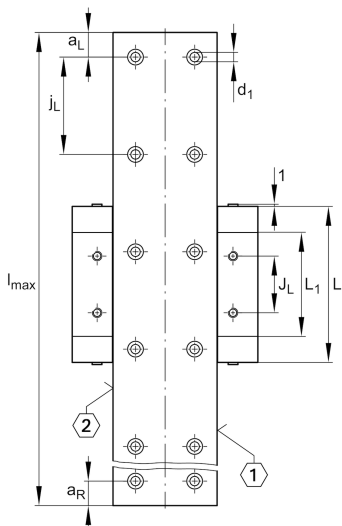

Dimensions

l_{max}	1.960 mm	Max length single piece guideway
$a_{L\ max}$	34 mm	Distance
$a_{L\ min}$	20 mm	Distance
$a_{R\ max}$	34 mm	Distance
$a_{R\ min}$	20 mm	Distance
j_L	40 mm	Increment
j_B	18 mm	Increment
a_5	6,9 mm	Distance
h_1	3,4 mm	Length

