




TLS-15T

Hydraulic wedge spreader

BETEX TLS, for lifting loads and spreading
2 components

Informacje techniczne

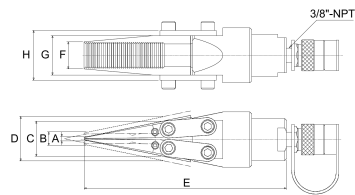

Twoja aktualna wersja produktu

Version	SP	Single product
---------	----	----------------

Technical data

	15	Capacity class (tons)
	25 mm	Stroke cylinder
	700 bar	Operating pressure
A	5 mm	Spread, min.
B	15 mm	Spread, max.
C	36 mm	
D	46 mm	
E	232 mm	
F	31 mm	
G	45 mm	
H	57 mm	
≈m	3 kg	Masa

Additional information

Hardened steel jaws, vertical lifting to exact position, use in narrow spaces from 5 to 43 mm, can be operated by one person	Product specifics
for industrial maintenance and repair jobs	Usability
1 piece wedge spreader	Delivery scope