




TLS-25T

Hydraulic wedge spreader

BETEX TLS, for lifting loads and spreading
2 components

Informacje techniczne

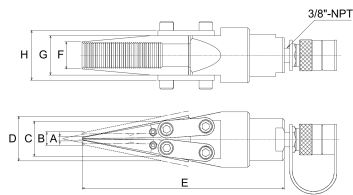

Twoja aktualna wersja produktu

Version	SP	Single product
---------	----	----------------

Technical data

	25	Capacity class (tons)
	65 mm	Stroke cylinder
	700 bar	Operating pressure
A	7 mm	Spread, min.
B	23 mm	Spread, max.
C	42,5 mm	
D	59 mm	
E	342 mm	
F	50,5 mm	
G	70 mm	
H	82 mm	
≈m	8 kg	Masa

Additional information

Hardened steel jaws, vertical lifting to exact position, use in narrow spaces from 5 to 43 mm, can be operated by one person	Product specifics
for industrial maintenance and repair jobs	Usability
1 piece wedge spreader	Delivery scope