




TLS-25T-DUO-SET

Hydraulic wedge spreader

BETEX TLS Duo set, for lifting loads and spreading 2 components

Informacje techniczne

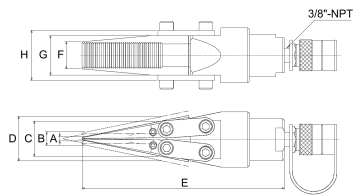

Twoja aktualna wersja produktu

Version	DS	Duo set
---------	----	---------

Technical data

	25 (2x)	Capacity class (tons)
	65 mm	Stroke cylinder
	700 bar	Operating pressure
A	7 mm	Spread, min.
B	23 mm	Spread, max.
C	42,5 mm	
D	59 mm	
E	342 mm	
F	50,5 mm	
G	70 mm	
H	82 mm	
≈m	37 kg	Masa



Additional information

Hardened steel jaws, vertical lifting to exact position, use in narrow spaces from 5 to 43 mm, can be operated by one person	Product specifics
for industrial maintenance and repair jobs	Usability
2 wedge spreaders, two-stage hand pump with double manifold, 2x hose with quick coupling set, 2x stepped safety block, 2x pressure gauge, 2x T-piece, steel box	Delivery scope