




**TSX45X6000-E-ADE-0001-EWL-G1**

Profile rail

Guideways for linear recirculating roller bearing, with slot for covering strip, TSX...-E-ADE

Informacje techniczne

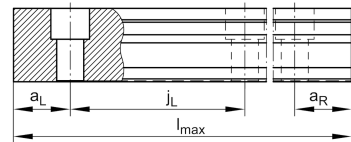

Twoja aktualna wersja produktu


|                 |       |                                                                   |
|-----------------|-------|-------------------------------------------------------------------|
| Size code       | 45    |                                                                   |
| Length          | ~6000 |                                                                   |
| Version         | E     |                                                                   |
| Guideway design | ADE   | For stainless steel cover strip, reusable, can be slid into place |
| Accuracy class  | G1    |                                                                   |

Main Dimensions & Performance Data

|       |           |                 |
|-------|-----------|-----------------|
| I     | 6.000 mm  | Guideway length |
| h     | 38 mm     | Height          |
| b     | 45 mm     | Width           |
| Tol b | -0,005 mm | Upper tolerance |
| Tol b | -0,035 mm | Lower tolerance |
| ≈m    | 54,6 kg   | Masa            |

Mounting dimensions

|        |         |                                   |
|--------|---------|-----------------------------------|
| K 1    | M12     | Fixing screws (DIN ISO 4762-12.9) |
| d 1    | 13,4 mm | Bore diameter                     |
| K1 M A | 140 Nm  | Tightening torque                 |



Dimensions

|             |          |                                  |
|-------------|----------|----------------------------------|
| $l_{max}$   | 5.985 mm | Max length single piece guideway |
| $a_{L min}$ | 20 mm    | Distance                         |
| $a_{L max}$ | 41 mm    | Distance                         |
| $a_{R min}$ | 20 mm    | Distance                         |
| $a_{R max}$ | 41 mm    | Distance                         |
| $j_L$       | 52,5 mm  | Increment                        |
| $h_1$       | 19,5 mm  | Length                           |
| Tol $h_1$   | 0,5 mm   | Upper tolerance                  |
| Tol $h_1$   | -0,5 mm  | Lower tolerance                  |
| $h_2$       | 1,1 mm   | Depth                            |
| $b_1$       | 22 mm    | Width                            |
| $d_{ADB}$   | 3,9 mm   | Bore diameter                    |
| $s$         | 0,6 mm   | Thickness                        |

Additional information

|                             |                       |
|-----------------------------|-----------------------|
| RWU45-E-...;<br>RWU45-F-... | Usable carriage(s)    |
| RUE45-E-...; RUE45-F-...    | Usable linear systems |