




FAG

UCFA210-32

Take-up housing unit

Housing units UCFA, cast iron housing, radial insert ball bearing with grub screws in inner ring, RSR seals, for swivel motion

Informacje techniczne

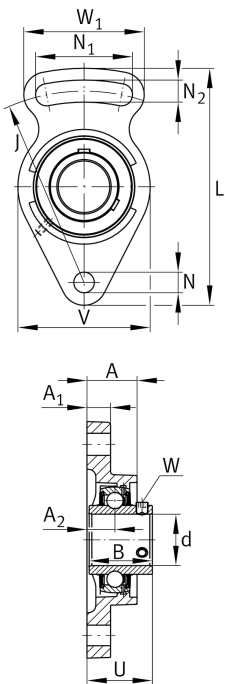

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	50,8 mm	Bore diameter
L	190 mm	Length total
U	54,6 mm	Total height unit
≈m	2,057 kg	Masa

Mounting dimensions

N	16 mm	Fixing bore
N ₁	76 mm	Length (slot)
N ₂	16 mm	Width (slot)
J	157 mm	Distance fixing bore

Dimensions

A ₁	18 mm	Thickness of flange
A ₂	22 mm	Distance raceway
A	37,5 mm	Height housing
V	115 mm	Shoulder diameter housing
W	94 mm	Width housing slot side
Q	M6	Connection thread for lubrication



Additional information

FA210	Housing
UC210-32	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.