
**FAG****UCFA211-32**

Take-up housing unit

Housing units UCFA, cast iron housing, radial insert ball bearing with grub screws in inner ring, RSR seals, for swivel motion

Informacje techniczne

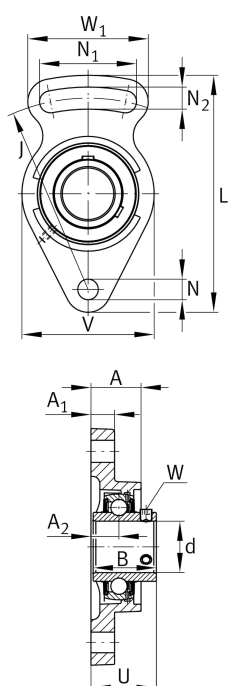

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	50,8 mm	Bore diameter
L	219 mm	Length total
U	58,4 mm	Total height unit
≈m	3,11 kg	Masa

Mounting dimensions

N	16 mm	Fixing bore
N ₁	86 mm	Length (slot)
N ₂	16 mm	Width (slot)
J	184 mm	Distance fixing bore

Dimensions

A ₁	20 mm	Thickness of flange
A ₂	25 mm	Distance raceway
A	43 mm	Height housing
V	130 mm	Shoulder diameter housing
W	104 mm	Width housing slot side
Q	M6	Connection thread for lubrication



Additional information

FA211	Housing
UC211-32	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.