




FAG

UEL211

Flanged housing unit

Flanged housing units UELF, cast iron housing, four-bolt flange, radial insert ball bearing with eccentric locking collar, RSR seals

Informacje techniczne

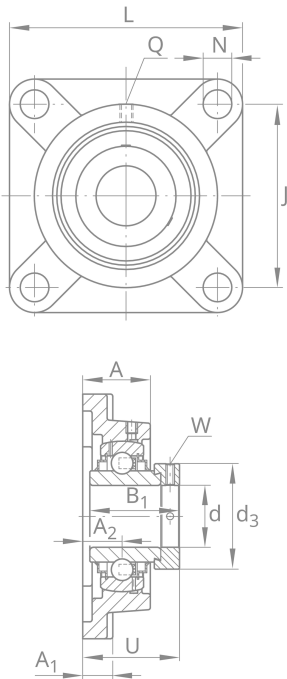

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	55 mm	Bore diameter
L	162 mm	Flange width
U	68,6 mm	Total height unit
C _r	46.000 N	Basic dynamic load rating, radial
C _{0r}	29.000 N	Basic static load rating, radial
≈m	3,59 kg	Masa

Mounting dimensions

J	130 mm	Distance fixing bore
N	19 mm	Fixing bore

Dimensions

A	43 mm	Height housing
A ₁	20 mm	Thickness of flange
A ₂	25 mm	Distance raceway
B ₁	71,4 mm	Locking collar total width
Q	M6	Connection thread for lubrication
d ₃	76 mm	Outside diameter eccentric locking collar



Additional information

GEHF211-GG	Housing
UEL211	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.