FAG

UKF209

Flanged housing unit

Flanged housing unit UKF

Informacje techniczne

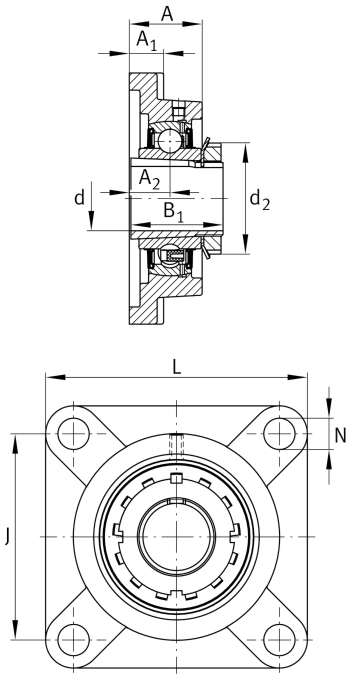

Twoja aktualna wersja produktu

Material	GG	Grey cast iron

Main Dimensions & Performance Data

d	40 mm	Bore diameter
L	137 mm	Flange width
C_r	34.500 N	Basic dynamic load rating, radial
C_{0r}	20.400 N	Basic static load rating, radial
C_{ur}	1.060 N	Fatigue load limit, radial
≈m	2,43 kg	Masa

Mounting dimensions

J	105 mm	Distance fixing bore
N	16 mm	Fixing bore
n	4	Number of screwing holes

Dimensions

A	38 mm	Height housing
A_1	18 mm	Thickness of flange
A_2	22 mm	Distance raceway
B	32 mm	Width
B_1	50 mm	Locking collar total width
d_3	65 mm	Outside diameter eccentric locking collar

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje

Additional information

	1	Number of housings
	F209	Housing
	UK209	Bearing designation

Temperature range

T_{min}	-20 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje