FAG

UKF217

Flanged housing unit

Flanged housing unit UKF

Informacje techniczne



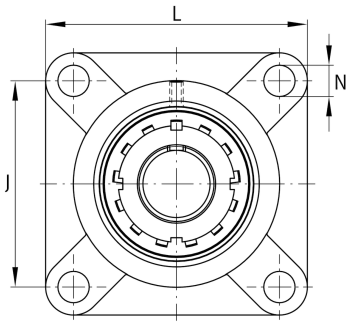

Twoja aktualna wersja produktu

Material	GG	Grey cast iron

Main Dimensions & Performance Data

d	75 mm	Bore diameter
L	220 mm	Flange width
C_r	88.000 N	Basic dynamic load rating, radial
C_{0r}	64.000 N	Basic static load rating, radial
C_{ur}	3.050 N	Fatigue load limit, radial
≈m	9,55 kg	Masa

Mounting dimensions

J	175 mm	Distance fixing bore
N	23 mm	Fixing bore
n	4	Number of screwing holes

Dimensions

A	63 mm	Height housing
A_1	26 mm	Thickness of flange
A_2	36 mm	Distance raceway
B	48 mm	Width
B_1	82 mm	Locking collar total width
d_3	110 mm	Outside diameter eccentric locking collar

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje

Additional information

	1	Number of housings
	F217	Housing
	UK217	Bearing designation

Temperature range

T_{min}	-20 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje