**FAG****UKP213**

Plummer block housing unit

Plummer block housing units UKP, cast iron housing, with long base, radial insert ball bearing with adapter sleeve, RSR seals

Informacje techniczne

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
Housing clearance	J7	Normal swivel torque

Main Dimensions & Performance Data


d	60 mm	Bore diameter
L	265 mm	Length total
H ₂	151 mm	Height
≈m	5,71 kg	Masa

Mounting dimensions

J	203 mm	Distance fixing bore
N	25 mm	Width (slot)
N ₁	29 mm	Length (slot)

Dimensions

H	76,2 mm	Distance shaft axis
A	70 mm	Width (base)
H ₁	27 mm	Height (base)
B ₁	65 mm	Locking collar total width
Q	M6	Connection thread for lubrication

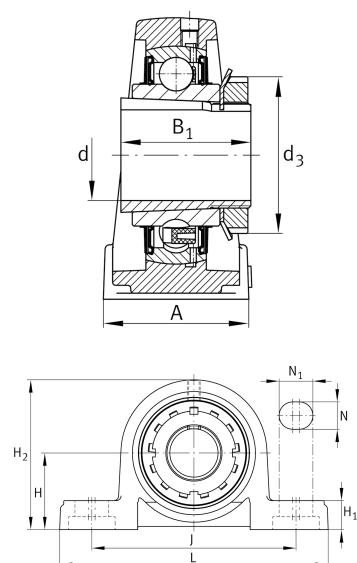



Additional information

P213	Housing
UK213	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.