




FAG

UKT216

Take-up housing unit

Housing units UKT, cast iron housing, radial insert ball bearing with adapter sleeve, RSR seals, for linear motion

Informacje techniczne

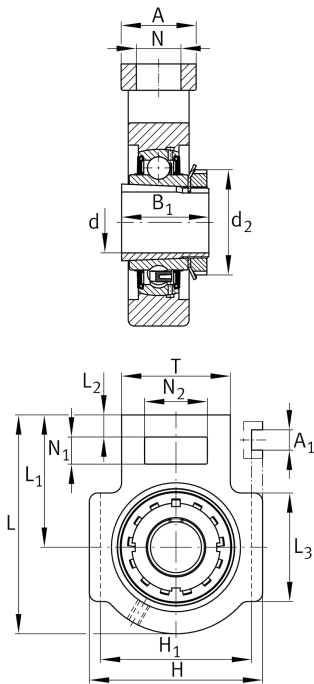

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	70 mm	Bore diameter
---	-------	---------------

H	184 mm	Height
---	--------	--------

L	235 mm	Length total
---	--------	--------------

B 1	78 mm	Locking collar total width
-----	-------	----------------------------

m	8,63 kg	Masa
---	---------	------

Mounting dimensions

A 1	26 mm	Width guidance groove
-----	-------	-----------------------

	0,3 mm	Upper width guidance groove tolerance
--	--------	---------------------------------------

	0 mm	Lower width guidance groove tolerance
--	------	---------------------------------------

H 1	165 mm	Distance guidance grooves
-----	--------	---------------------------

	0 mm	Upper distance guidance groove tolerance
--	------	--

	-0,8 mm	Lower distance guidance groove tolerance
--	---------	--

N	41 mm	Fixing bore
---	-------	-------------



Dimensions

L ₁	140 mm	Distance shaft axis
L ₂	21 mm	Length fixed link
L ₃	121 mm	Length guidance groove
A	70 mm	Width housing fixing side
N ₁	32 mm	Width recess
N ₂	70 mm	Height recess
T	111 mm	Height housing fixing side
Q	M6	Connection thread for lubrication
A ₂	51 mm	Width housing

Additional information

T216	Housing
UK216	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.