
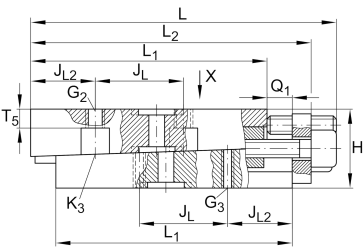


VUS26102-A

Adjusting gib

Informacje techniczne




Twoja aktualna wersja produktu

Size 26102

Version A

Main Dimensions & Performance Data

L	113 mm	Length max
H	25 mm	Height min
B	39,5 mm	Width
≈m	0,71 kg	Masa

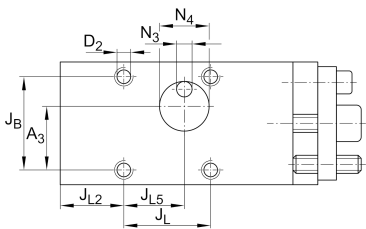

Mounting dimensions

L 1	91 mm	
L 2	105 mm	Max
J B	30 mm	
Tol J B	+ 0,1 mm	Upper tolerance
Tol J B	- 0,1 mm	Lower tolerance
J L	44 mm	
Tol J L	+ 0,1 mm	Upper tolerance
Tol J L	- 0,1 mm	Lower tolerance
J L2	20,5 mm	
J L5	27,5 mm	
Q 1	8 mm	Max
A 3	20,5 mm	
A 4	16 mm	
N 3	5 mm	
N 4	16 mm	
T 5	6 mm	



Additional information

S 1	6 mm	Adjustment screw hexagon socket
S 2	3 mm	Locking/extraction screw hexagon socket
G 2	M6	Fixing screws DIN ISO4762-12.9
M A G2	17 Nm	Tightening torque
G 3	M4	Fixing screws DIN ISO4762-12.9
M A G3	5 Nm	Tightening torque
K 3	M4	Fixing screws DIN ISO4762-12.9
M A K3	5 Nm	Tightening torque
D 2	4,9 mm	Core hole
Δh	0,4 mm	Adjustment max
	0,05 mm	Adjustment per screw revolution

Related products

RUS26102	For linear roller bearing
----------	---------------------------