






25.08.2026, 03:11:58 UTC



VUS26126-A

Adjusting gib

Informacje techniczne

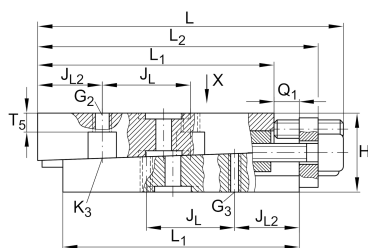


Twoja aktualna wersja produktu

Size	26126
Version	A

Main Dimensions & Performance Data

L	137 mm	Length max
H	25 mm	Height min
B	39,5 mm	Width
m	0,89 kg	Masa

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje

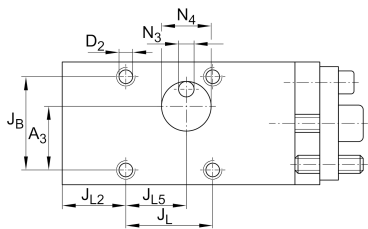

Mounting dimensions

L 1	115 mm	
L 2	129 mm	Max
J B	30 mm	
Tol J B	+ 0,1 mm	Upper tolerance
Tol J B	- 0,1 mm	Lower tolerance
J L	68 mm	
Tol J L	+ 0,1 mm	Upper tolerance
Tol J L	- 0,1 mm	Lower tolerance
J L2	20,5 mm	
J L5	39,5 mm	
Q 1	8 mm	Max
A 3	20,5 mm	
N 3	5 mm	
N 4	16 mm	
T 5	6 mm	



Additional information

S 1	6 mm	Adjustment screw hexagon socket
S 2	3 mm	Locking/extraction screw hexagon socket
G 2	M6	Fixing screws DIN ISO4762-12.9
M A G2	17 Nm	Tightening torque
G 3	M4	Fixing screws DIN ISO4762-12.9
M A G3	5 Nm	Tightening torque
K 3	M4	Fixing screws DIN ISO4762-12.9
M A K3	5 Nm	Tightening torque
D 2	4,9 mm	Core hole
Δh	0,4 mm	Adjustment max
	0,05 mm	Adjustment per screw revolution

Related products

RUS26126	For linear roller bearing
----------	---------------------------