



25.08.2026, 05:42:29 UTC


SCHAEFFLER



VUS38134-A

Adjusting gib

Informacje techniczne

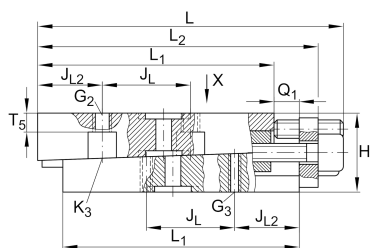


Twoja aktualna wersja produktu

Main Dimensions & Performance Data

L	141 mm	Length max
H	30 mm	Height min
B	51,5 mm	Width
m	1,4 kg	Masa

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje

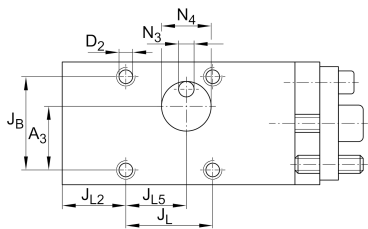

Mounting dimensions

L 1	115 mm	
L 2	131 mm	Max
J B	41 mm	
Tol J B	+ 0,1 mm	Upper tolerance
Tol J B	- 0,1 mm	Lower tolerance
J L	51 mm	
Tol J L	+ 0,1 mm	Upper tolerance
Tol J L	- 0,1 mm	Lower tolerance
J L2	28 mm	
J L5	30,5 mm	
Q 1	8 mm	Max
A 3	28,25 mm	
N 3	5 mm	
N 4	22 mm	
T 5	7 mm	



Additional information

S 1	8 mm	Adjustment screw hexagon socket
S 2	4 mm	Locking/extraction screw hexagon socket
G 2	M8	Fixing screws DIN ISO4762-12.9
M A G2	41 Nm	Tightening torque
G 3	M6	Fixing screws DIN ISO4762-12.9
M A G3	17 Nm	Tightening torque
K 3	M6	Fixing screws DIN ISO4762-12.9
M A K3	17 Nm	Tightening torque
D 2	6,9 mm	Core hole
Δh	0,4 mm	Adjustment max
	0,062 mm	Adjustment per screw revolution

Related products

RUS38134	For linear roller bearing
----------	---------------------------