


VUS38206-A

Adjusting gib

Informacje techniczne

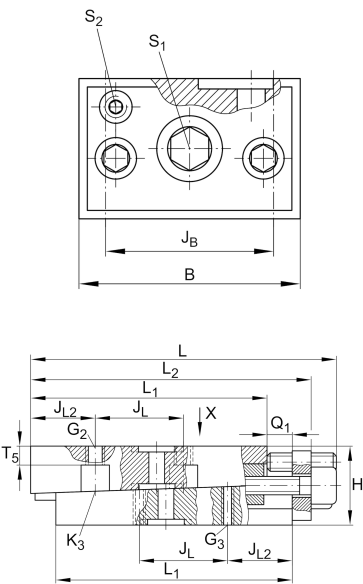


Twoja aktualna wersja produktu

Size	38206
Version	A

Main Dimensions & Performance Data

L	250 mm	Length max
H	25 mm	Height min
B	51,5 mm	Width
≈m	2,08 kg	Masa

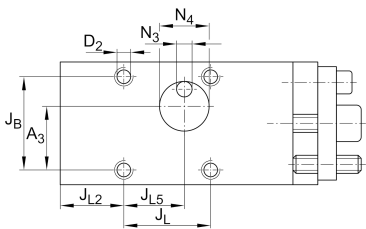

Mounting dimensions

L 1	200 mm	
L 2	240 mm	Max
J B	41 mm	
Tol J B	+ 0,1 mm	Upper tolerance
Tol J B	- 0,1 mm	Lower tolerance
J L	102 mm	
Tol J L	+ 0,1 mm	Upper tolerance
Tol J L	- 0,1 mm	Lower tolerance
J L2	49 mm	
J L5	61 mm	
Q 1	30 mm	Max
A 3	28,25 mm	
N 3	5 mm	
N 4	22 mm	
T 5	5 mm	

Additional information

S 1	8 mm	Adjustment screw hexagon socket
S 2	5 mm	Locking/extraction screw hexagon socket
G 3	M6	Fixing screws DIN ISO4762-12.9
M A G3	17 Nm	Tightening torque
K 3	M6	Fixing screws DIN ISO4762-12.9
M A K3	17 Nm	Tightening torque
D 2	6,9 mm	Core hole
Δh	1 mm	Adjustment max
	0,05 mm	Adjustment per screw revolution



Wyświetl szczegóły produktu na platformie medias

25.08.2026, 05:49:13 UTC

SCHAEFFLER

Related products

RUS38206

For linear roller bearing