


XSA140544-N

Slewing ring, crossed roller bearing, external gear teeth

Crossed roller bearings, standard series 14,
external gear teeth, lip seals on both sides

Informacje techniczne

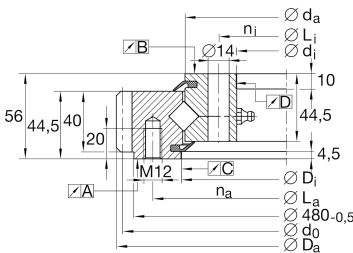

Twoja aktualna wersja produktu

Gearing	N	Normalized gear teeth on bearing ring
---------	---	---------------------------------------

Main Dimensions & Performance Data

d iZT	474 mm	Diameter centring inner ring
IT7		Diameter centring inner ring tolerance
t	10 mm	Length centering inner ring
D a	640,3 mm	Outside Diameter
D i ZT	547 mm	Diameter centring outer ring
IT7		Diameter centring outer ring tolerance
T	4,5 mm	Length centering outer ring
H	56 mm	Height
≈m	44,1 kg	Masa



Dimensions

h _a	44,5 mm	Width outer ring
L _a	585 mm	Pitchcircle diameter fixing holes outer ring
n _a	28	Number of fixing holes in outer ring
b	44,5 mm	Width gearing
m	6 mm	Modul of gearing
z	105	Number of teeth
d ₀	630 mm	Pitch circle diameter gearing
F _{z norm}	21.300 N	Max. tooth force root fatigue strenght (at a shock factor of 1,2)
F _{z max}	31.500 N	Max. tooth force against tooth fracture (at a shock factor of 1,35)
d _a	543 mm	Outside diameter inner ring
	0 mm	Outside diameter inner ring upper tolerance
	-0,5 mm	Outside diameter inner ring lower tolerance
h	44,5 mm	Height of individual ring
d _B	14 mm	Fixing bore
L _i	498 mm	Pitchcircle diameter fixing holes inner ring
n _i	32	Number of fixing holes in inner ring
	M12	Tread fixing bore
t _G	20 mm	Thread depth oil connector
	0,04 mm	Running accuracy A (related to the raceway)
	0,04 mm	Running accuracy B (related to the raceway)
	0,07 mm	Running accuracy C (related to the raceway)
	0,06 mm	Running accuracy D (related to the raceway)

Temperature range

T _{min}	-25 °C	Operating temperature min.
T _{max}	80 °C	Operating temperature max.



Calculation factors

C_a	231.000 N	Basic dynamic load rating, axial
C_{0a}	700.000 N	Basic static load rating, axial
C_r	164.000 N	Basic dynamic load rating, radial (for radial load only)
C_{0r}	345.000 N	Basic static load rating, radial (for radial load only)
VSP_{max}	0,03 mm	Maximum bearing preload
VSP_{min}	0,01 mm	Min. bearing preload
$F_{r\ zul}$	115.600 N	Max. radial load fixing screws (friction locking)

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Momenty względem wszystkich osi
- 

Smarowanie smarem
- 

Uszczelnienie dwustronne
- 

Łożysko gabarytowe