



25.08.2026, 03:12:09 UTC


SCHAEFFLER

XSU080188

Slewing ring, Crossed roller bearing, without gear teeth

Crossed roller bearings standard series 08, without gear teeth, lamellar seals on both sides

Informacje techniczne

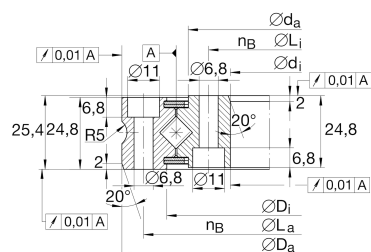

Main Dimensions & Performance Data

d _i	150 mm	Bore Diameter
	0,025 mm	Bore diameter upper tolerance
	0 mm	Bore diameter lower tolerance
D _a	225 mm	Outside Diameter
	0 mm	Outside diameter upper tolerance
	-0,029 mm	Outside diameter lower tolerance
H	25,4 mm	Height
m	3,55 kg	Masa

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje



Dimensions

D _i	194 mm	Inner diameter outer ring
h _a	24,8 mm	Height outer ring
L _a	210 mm	Pitchcircle diameter fixing holes outer ring
n _a	16	Number of fixing holes in outer ring
d _a	179 mm	Outside diameter inner ring
h _i	24,8 mm	Height of inner ring
d _B	6,8 mm	Fixing bore
d _S	11 mm	Counterbore diameter of fixing holes
t _S	6,8 mm	Counterbore depth of fixing holes
L _i	165 mm	Pitchcircle diameter fixing holes inner ring
n _i	16	Number of fixing holes in inner ring
r _{groove}	5 mm	Groove radius
	0,01 mm	Running accuracy A (related to the raceway)

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	80 °C	Operating temperature max.

Calculation factors

C _a	70.000 N	Basic dynamic load rating, axial
C _r	49.500 N	Basic dynamic load rating, radial (for radial load only)
C _{0a}	265.000 N	Basic static load rating, axial
C _{0r}	130.000 N	Basic static load rating, radial (for radial load only)
n _G	203 1/min	Limiting speed
F _{r zu.}	10.900 N	Max. radial load screws



Właściwości



Obciążenie promieniowe



Obciążenie osiowe jednokierunkowe



Obciążenie osiowe dwukierunkowe



Momenty względem wszystkich osi



Smarowanie smarem



Uszczelnienie dwustronne