



YRTC200-XL


Axial/radial roller bearing

Axial/radial bearings, double direction, for screw mounting



X-life

Informacje techniczne

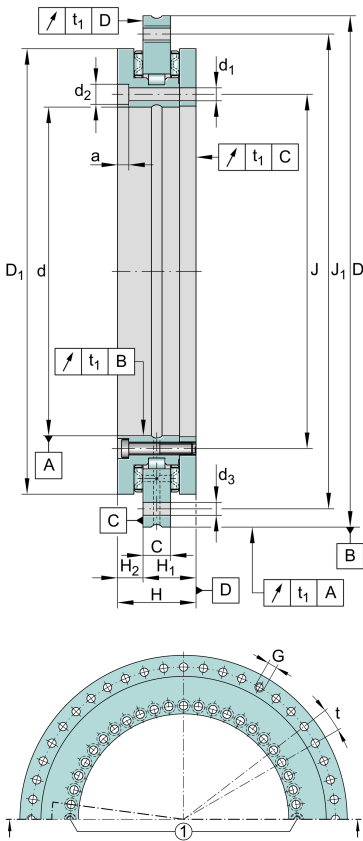



Mounting dimensions

J	215 mm	Pitch circle diameter fixing holes in inner ring
J 1	285 mm	Pitch circle diameter fixing holes in outer ring
d 1	7 mm	Fixing holes diameter inner ring
d 2	11 mm	Counterbore diameter of fixing holes
a	6,2 mm	Counterbore depth of fixing holes
	46	Quantity of fixing holes inner ring
d 3	7 mm	Fixing holes diameter outer ring
	45	Quantity of fixing holes outer ring
n	48	Pitch quantity
t	7,5 °	Pitch separation angle
G	M8	Threaded extraction hole
	3	Quantity of threaded extraction hole
M A	14 Nm	Screw tightening torque
	2	Quantity of retaining screws
t 1	4 µm	Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.

Dimensions

H 1	30 mm	Height contact face outer ring
	0,03 mm	Height contact face outerring H1 upper tolerance
	-0,03 mm	Height contact face outerring H1 lower tolerance
H 2	15 mm	Height contact face outer ring
	0,025 mm	Height contact face outerring H2 upper tolerance
	-0,025 mm	Height contact face outerring H2 lower tolerance
D 1 max	274,4 mm	Maximum diameter inner ring
C	15 mm	Width of outer ring



Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Additional information

c _{aL}	9.800 N/μm	Axial rigidity of bearing position
c _{rL}	5.700 N/μm	Radial rigidity of bearing position
c _{kL}	64.000 Nm/mrad	Tilting rigidity of bearing position
c _{aW}	15.500 N/μm	Axial rigidity of rolling element set
c _{rW}	6.200 N/μm	Radial rigidity of rolling element set
c _{kW}	128.000 Nm/mrad	Tilting rigidity of rolling element set

Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Momenty względem wszystkich osi
-  Smarowanie smarem
-  Bez uszczelnienia