



YRTC650-XL


Axial/radial roller bearing

Axial/radial bearings, double direction, for screw mounting



X-life

Informacje techniczne

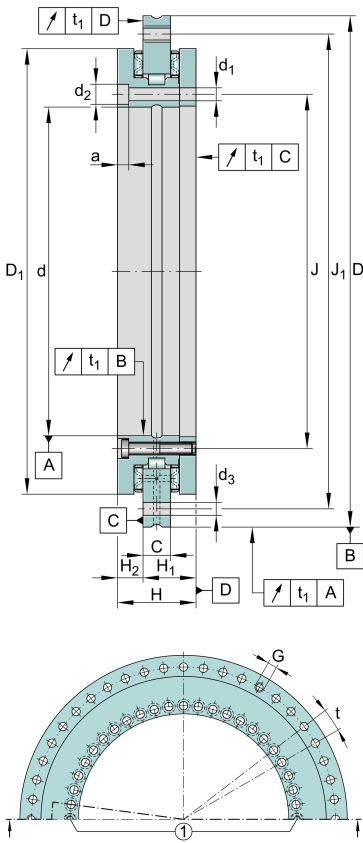

Twoja aktualna wersja produktu

Angular measuring system integrated No

Main Dimensions & Performance Data

d	650 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,038 mm	Bore diameter lower tolerance
D	870 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0,05 mm	Outside diameter lower tolerance
H	122 mm	Height
C _r	480.000 N	Basic dynamic load rating, radial
C _{0r}	1.390.000 N	Basic static load rating, radial
C _a	910.000 N	Basic dynamic load rating, axial
C _{0a}	6.800.000 N	Basic static load rating, axial
n _G	70 1/min	Limiting speed
M _R	70 Nm	Bearing friction torque at 5 1/min
≈m	165 kg	Masa



Mounting dimensions

J	680 mm	Pitch circle diameter fixing holes in inner ring
J 1	830 mm	Pitch circle diameter fixing holes in outer ring
d 1	14 mm	Fixing holes diameter inner ring
d 2	20 mm	Counterbore diameter of fixing holes
a	13 mm	Counterbore depth of fixing holes
	46	Quantity of fixing holes inner ring
d 3	14 mm	Fixing holes diameter outer ring
	42	Quantity of fixing holes outer ring
n	48	Pitch quantity
t	7,5 °	Pitch separation angle
G	M12	Threaded extraction hole
	6	Quantity of threaded extraction hole
M A	116 Nm	Screw tightening torque
	2	Quantity of retaining screws
t 1	10 µm	Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.

Dimensions

H 1	78 mm	Height contact face outer ring
	0,25 mm	Height contact face outerring H1 upper tolerance
	-0,25 mm	Height contact face outerring H1 lower tolerance
H 2	44 mm	Height contact face outer ring
	0,25 mm	Height contact face outerring H2 upper tolerance
	-0,25 mm	Height contact face outerring H2 lower tolerance
D 1 max	800 mm	Maximum diameter inner ring
C	34 mm	Width of outer ring



Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Additional information

c _{aL}	41.200 N/μm	Axial rigidity of bearing position
c _{rL}	14.600 N/μm	Radial rigidity of bearing position
c _{kL}	1.909.000 Nm/mrad	Tilting rigidity of bearing position
c _{aW}	51.400 N/μm	Axial rigidity of rolling element set
c _{rW}	12.500 N/μm	Radial rigidity of rolling element set
c _{kW}	3.554.000 Nm/mrad	Tilting rigidity of rolling element set

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Momenty względem wszystkich osi
- 

Smarowanie smarem
- 

Bez uszczelnienia
- 

Łożysko gabarytowe